

0705-5X0 Power line Refrigeration Gateway

Description:

O705-5X0 is an integrated communication device that enables a refrigeration unit to communicate over a LonTalk network. The device can connect up to 2 thermistor inputs. And it is implemented McDonald's function profile. The Gateway provides power output for external unit for easy installation.



Environmental:


1. Operating temperature: -30°C to +60°C
2. Storage temperature: -40°C to +85°C
3. Humidity: 95% relative, non-condensing
4. Weight: 1lb

Approval:

1. UL Listed (Pending, similar model had been approved by UL)
2. CE

Mechanical:

1. Mounting: Surface mount with 4 screws
2. Dimension: 8.2"x4.2"x1.93" metal box

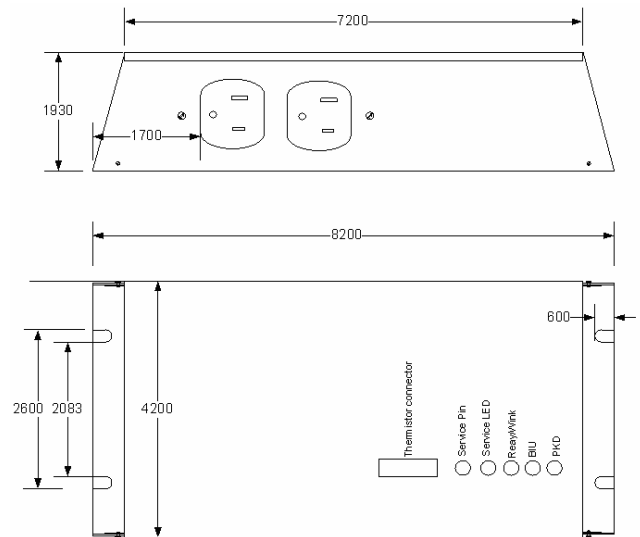

Input:

1. Voltage: 120VAC, 230VAC, 15A, 20A
2. Frequency: 50/60 Hz
3. Average Power Consumption of Gateway: <2VA

Output:

1. Voltage: 120VAC, 230VAC
2. Frequency: 50/60 Hz
Rating: 15A (NEMA 5-15R), 20A (NEMA 5-20R)

Order information:

Product	Input/Output	RoHS
0705-510	120VAC 15A (5-15R)	Yes
0705-511	120VAC, 20A (5-20R)	Yes
0705-520	230VAC, 15A (6-15R)	Yes

MaxTronic Technologies LLC

www.maxtronictech.com Phone: (704)756-5354 Fax: (704)321-9411 E-mail: sales@maxtronictech.com